

Name _____ CM _____

ECE 300
Signals and Systems

Exam 2
30 April, 2009



NAME _____

This exam is closed-book in nature. *You may use a calculator for simple calculations during the exam, but not for integration.* Do not write on the back of any page, use the extra pages at the end of the exam.

Problem 1 _____ / 20
Problem 2 _____ / 25
Problem 3 _____ / 15
Problem 4 _____ / 20
Problem 5 _____ / 20

Exam 2 Total Score: _____ / 100

1) (20 points) The spectrum of periodic signal $x(t)$ is shown below. The period of this signal is $T_0 = 3$ seconds and all angles are multiples of 45 degrees.

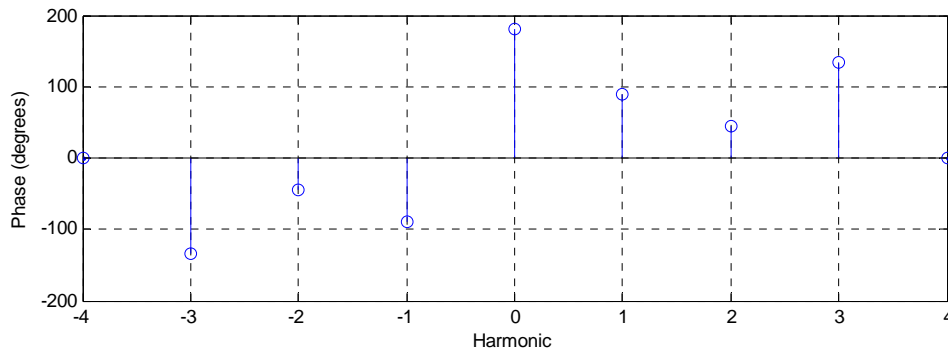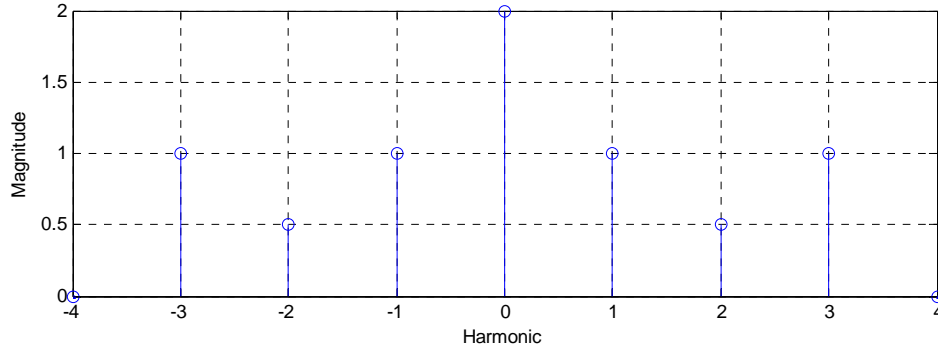

- a) Determine a closed-form expression for $x(t)$ in terms of cosines.
- b) Sketch the single-sided power spectrum for this signal as power versus harmonic. Be sure to label all significant points (values) on your graph.
- c) Compute the average power of this signal.
- d) Compute the average value of this signal.

Name _____ CM _____

2) (25 points) The periodic function $x(t)$ is defined over one period ($T_0 = 4$ seconds) as

$$x(t) = \begin{cases} 2 & -2 \leq t \leq 0 \\ 0 & 0 \leq t \leq 2 \end{cases}$$

Determine the complex Fourier series coefficients, c_k .

Be sure to simplify your answer as much as possible and use a sinc function if appropriate. Recall that $1 = e^0$.

3) (15 points) Assume the periodic signal $x(t)$ with the Fourier series representation

$$x(t) = \sum_k c_k^x e^{jk\omega_0 t}$$

is the input to an LTI system described by the differential equation

$$\dot{y}(t) + ay(t) = dx(t - b)$$

Since the system is LTI the output will be periodic with Fourier series representation

$$y(t) = \sum_k c_k^y e^{jk\omega_0 t}$$

- a)** Determine an algebraic relationship between c_k^x and c_k^y
- b)** Determine the (continuous frequency) transfer function $H(j\omega)$ relating the input and output.

4) (20 points) The periodic signal $x(t)$ has the Fourier series representation

$$x(t) = \sum_{k=-\infty}^{k=\infty} \frac{1}{1+kj} e^{jk2t}$$

$x(t)$ is the input to an LTI system (a band reject or notch filter) with the transfer function

$$H(j\omega) = \begin{cases} 2e^{-j3\omega} & |0 \leq |\omega| \leq 3.5 \text{ and } 4.5 \leq |\omega| < \infty \\ 0 & 3.5 < |\omega| < 4.5 \end{cases}$$

The steady state output of the system can be written as $y(t) = ax(t-b) + d \cos(et + f)$.



Determine numerical values for the parameters a, b, d, e and f

5) (20 points) Consider a causal linear time invariant system with impulse response given by

$$h(t) = e^{-0.75(t-1)}u(t-1)$$

The input to the system is given by

$$x(t) = u(t-1) - u(t-3) - u(t-4) + u(t-6)$$

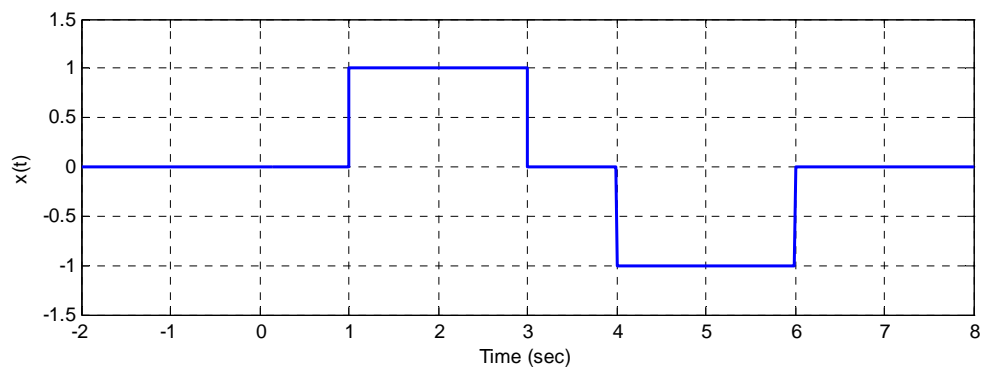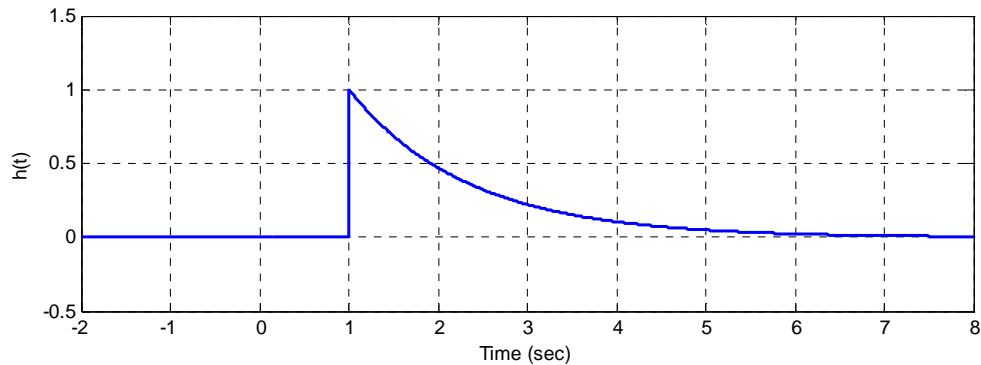

Using **graphical convolution**, determine the output $y(t)$. Specifically, you must

- Flip and slide $h(t)$, **NOT** $x(t)$
- Show graphs displaying both $h(t-\lambda)$ and $x(\lambda)$ for each region of interest
- Determine the range of t for which each part of your solution is valid
- Set up any necessary integrals to compute $y(t)$. Your integrals must be complete, in that they cannot contain the symbols $x(\lambda)$ or $h(t-\lambda)$ but must contain the actual functions.
- Your integrals cannot contain any unit step functions
- **DO NOT EVALUATE THE INTEGRALS!!**

Name _____ CM _____

Name _____ CM _____

Name _____ CM _____

Some Potentially Useful Relationships

$$E_{\infty} = \lim_{T \rightarrow \infty} \int_{-T}^T |x(t)|^2 dt = \int_{-\infty}^{\infty} |x(t)|^2 dt$$

$$P_{\infty} = \lim_{T \rightarrow \infty} \frac{1}{2T} \int_{-T}^T |x(t)|^2 dt$$

$$e^{jx} = \cos(x) + j \sin(x) \quad j = \sqrt{-1}$$

$$\cos(x) = \frac{1}{2} [e^{jx} + e^{-jx}] \quad \sin(x) = \frac{1}{2j} [e^{jx} - e^{-jx}]$$

$$\cos^2(x) = \frac{1}{2} + \frac{1}{2} \cos(2x) \quad \sin^2(x) = \frac{1}{2} - \frac{1}{2} \cos(2x)$$

$$\text{rect}\left(\frac{t-t_0}{T}\right) = u\left(t-t_0 + \frac{T}{2}\right) - u\left(t-t_0 - \frac{T}{2}\right)$$