

# **CSSE132**

# **Introduction to Computer Systems**


28 : Internetworking

April 25, 2013

# Today

- **Networks**
- **internet (lowercase i)**
- **Internet (uppercase i)**
  - History and evolution
  - IP addresses and domain names
  - Sockets


# A Client-Server Transaction

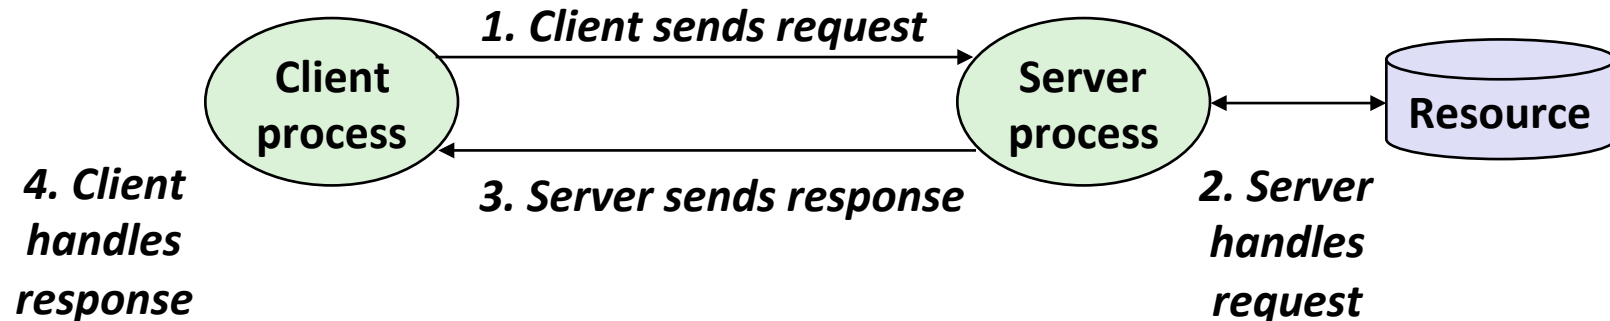

*Note: clients and servers are processes running on hosts  
(can be the same or different hosts)*

- **Most network applications are based on the client-server model:**
  - A **server** process and one or more **client** processes
  - Server manages some **resource**
  - Server provides **service** by manipulating resource for clients
  - Server activated by request from client (vending machine analogy)

# Hardware Organization of a Network Host

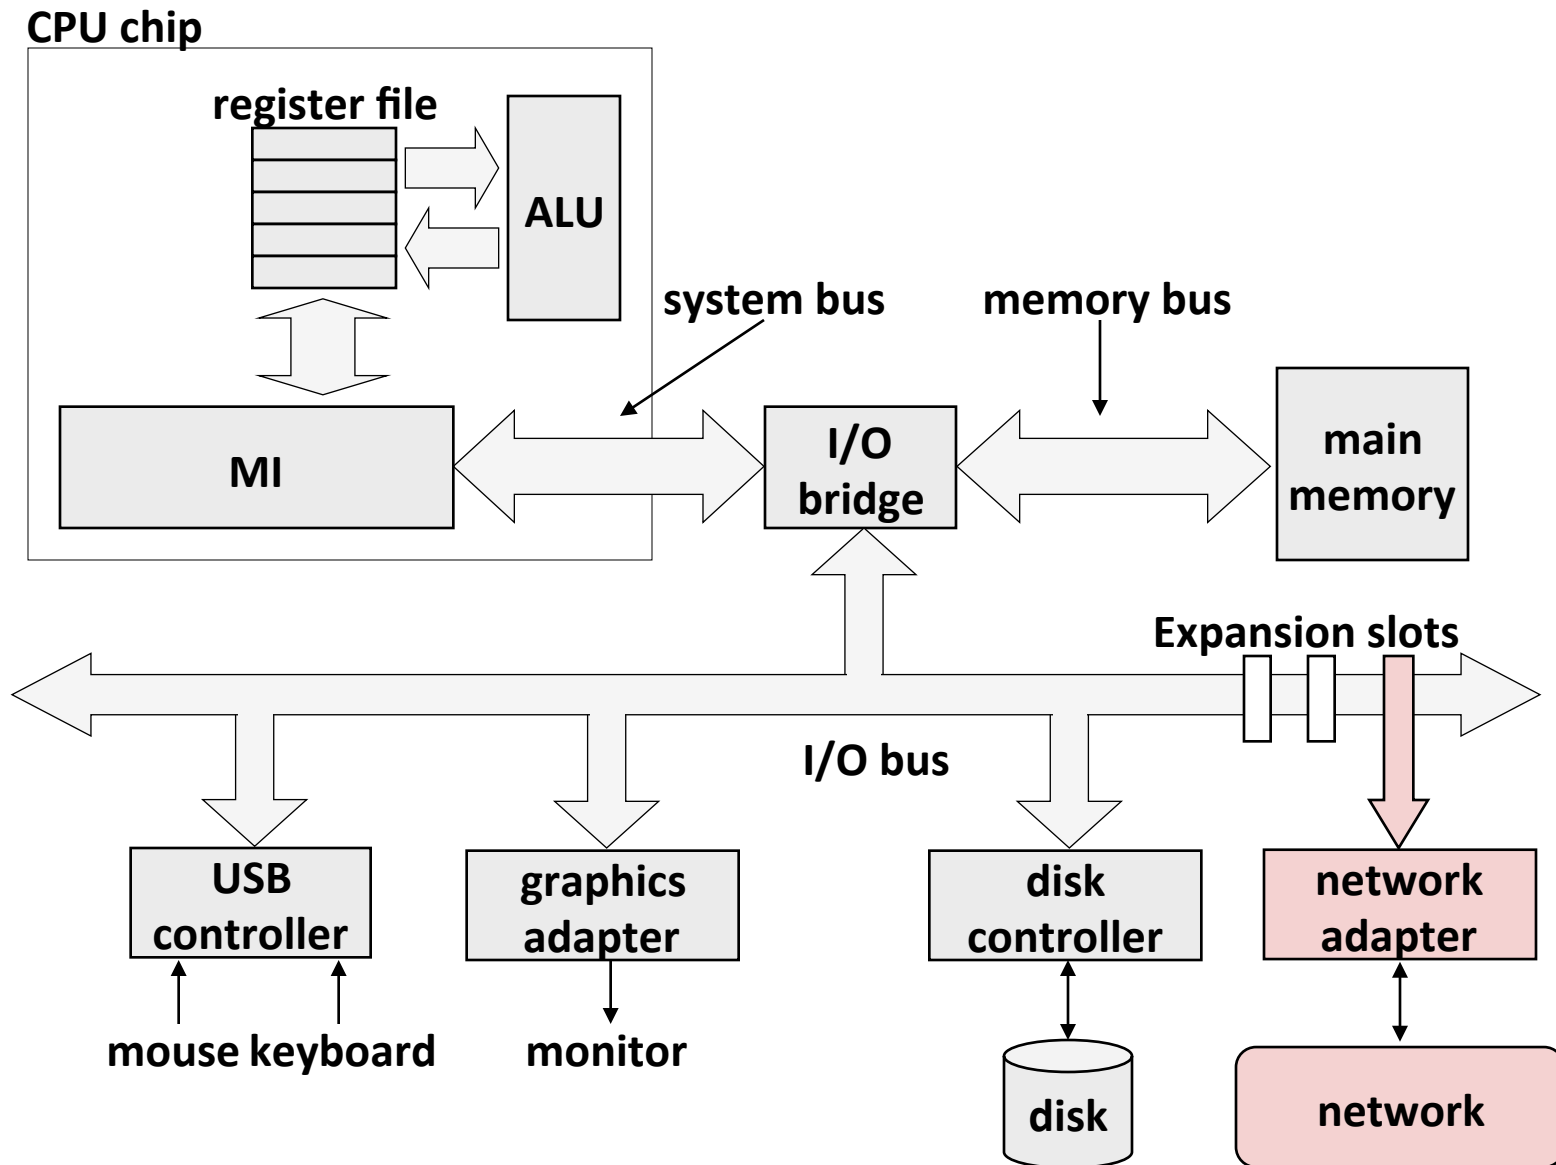


# Computer Networks

- A ***network*** is a hierarchical system of boxes and wires organized by geographical proximity
  - SAN (System Area Network) spans cluster or machine room
    - Switched Ethernet, Quadrics QSW, ...
  - LAN (Local Area Network) spans a building or campus
    - Ethernet is most prominent example
  - WAN (Wide Area Network) spans country or world
    - Typically high-speed point-to-point phone lines
- An ***internetwork (internet)*** is an interconnected set of networks
  - The Global IP Internet (uppercase “I”) is the most famous example of an internet (lowercase “i”)
- **Let’s see how an internet is built from the ground up**


# Today

- **Networks**
- **internet (lowercase i)**
- **Internet (uppercase i)**
  - History and evolution
  - IP addresses and domain names
  - Sockets

# Switches, routers and subnets

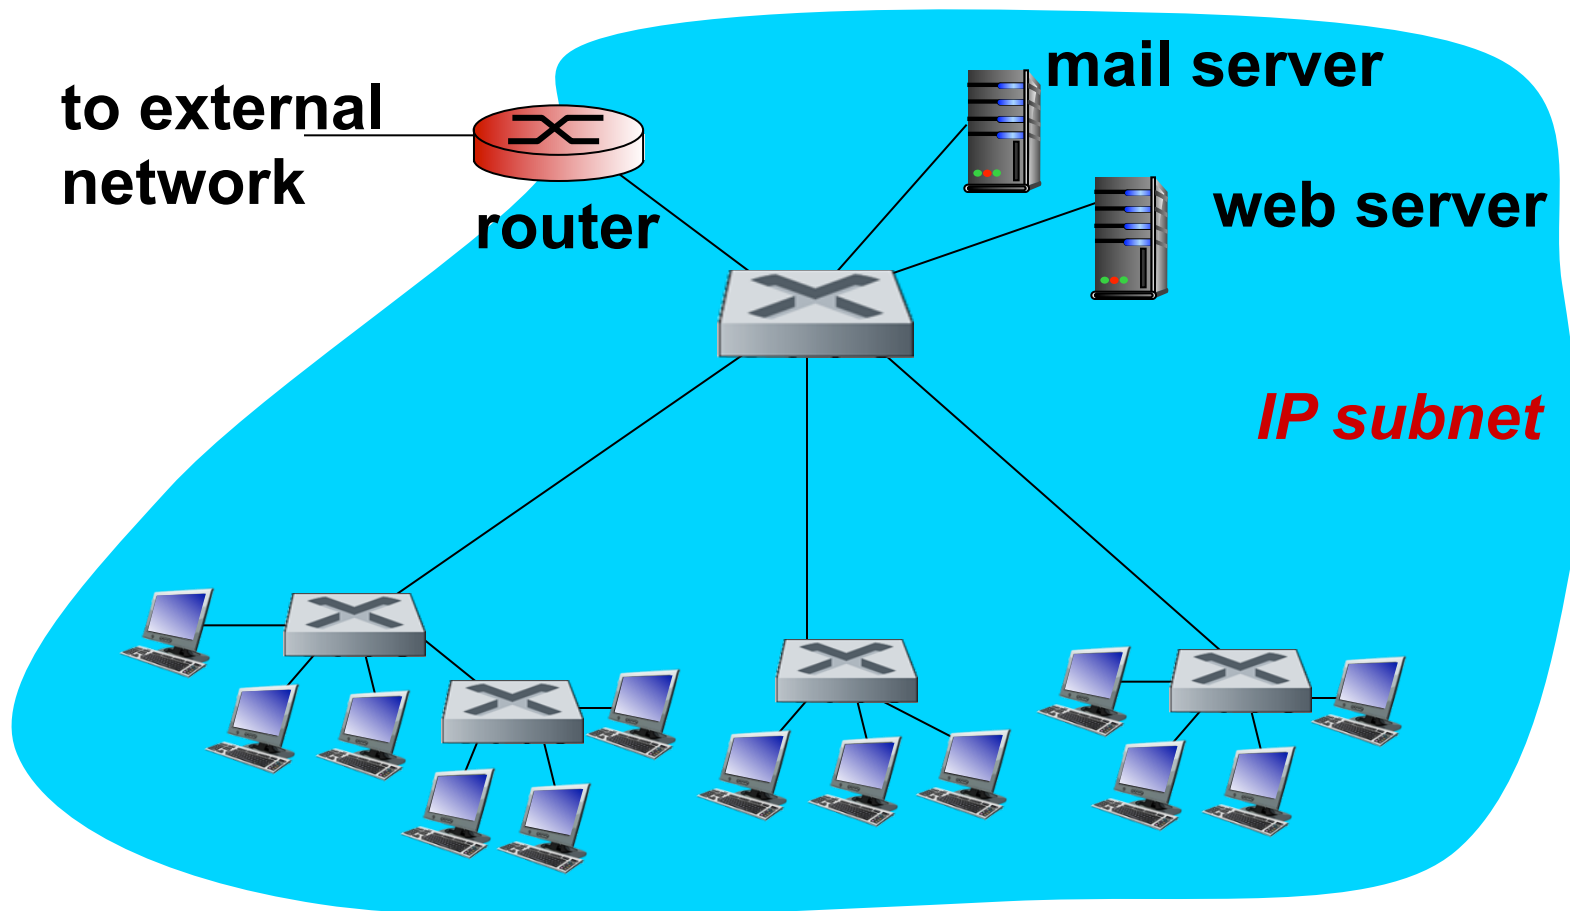

# Logical Structure of an internet

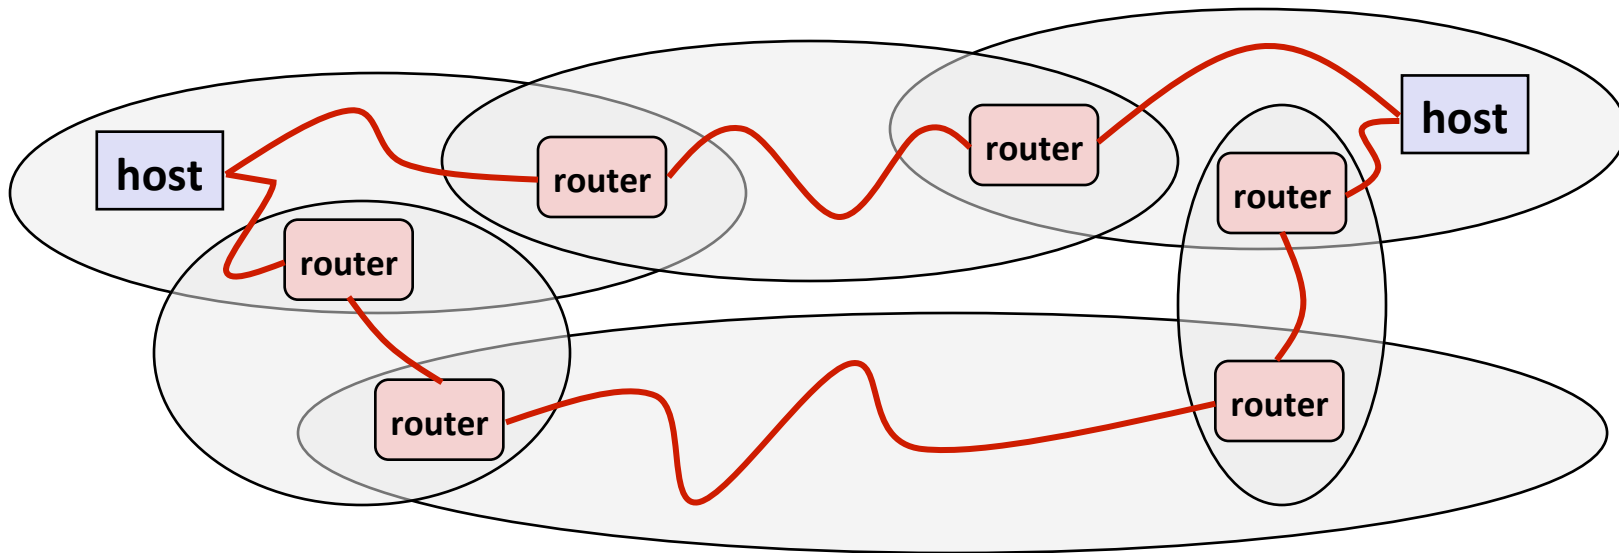

- **Ad hoc interconnection of networks**
  - No particular topology
  - Vastly different router & link capacities
- **Send packets from source to destination by hopping through networks**
  - Router forms bridge from one network to another
  - Different packets may take different routes



# The Notion of an internet Protocol

- **How is it possible to send bits across incompatible LANs and WANs?**
- **Solution:**
  - protocol software running on each host and router
  - smooths out the differences between the different networks
- **Implements an internet protocol (i.e., set of rules)**
  - governs how hosts and routers should cooperate when they transfer data from network to network
  - TCP/IP is the protocol for the global IP Internet

# What Does an internet Protocol Do?

## ■ Provides a naming scheme


- An internet protocol defines a uniform format for *host addresses*
- Each host (and router) is assigned at least one of these internet addresses that uniquely identifies it

## ■ Provides a delivery mechanism

- An internet protocol defines a standard transfer unit (*packet*)
- Packet consists of *header* and *payload*
  - Header: contains info such as packet size, source and destination addresses
  - Payload: contains data bits sent from source host

# Internet protocol stack

- **application:** supporting network applications
  - FTP, SMTP, HTTP
- **transport:** process-process data transfer
  - TCP, UDP
- **network:** routing of datagrams from source to destination
  - IP, routing protocols
- **link:** data transfer between neighboring network elements
  - Ethernet, 802.111 (WiFi), PPP
- **physical:** bits “on the wire”

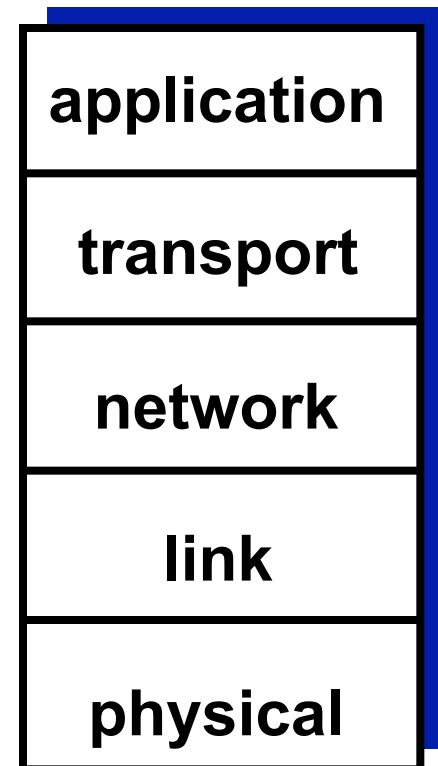

# Other Issues

- **We are glossing over a number of important questions:**
  - What if different networks have different maximum frame sizes? (segmentation)
  - How do routers know where to forward frames?
  - How are routers informed when the network topology changes?
  - What if packets get lost?
- **These (and other) questions are addressed by the area of systems known as *computer networking***


# Today

- **Networks**
- **internet (lowercase i)**
- **Internet (uppercase i)**
  - History and evolution
  - IP addresses and domain names
  - Sockets

# Global IP Internet

- Most famous example of an internet
- Based on the TCP/IP protocol family
  - IP (Internet protocol) :
    - Provides *basic naming scheme* and unreliable *delivery capability* of packets (datagrams) from host-to-host
  - UDP (Unreliable Datagram Protocol)
    - Uses IP to provide unreliable datagram delivery from *process-to-process*
  - TCP (Transmission Control Protocol)
    - Uses IP to provide *reliable* byte streams from process-to-process over connections
- Accessed via a mix of Unix file I/O and functions from the *sockets interface*

# Hardware and Software Organization of an Internet Application

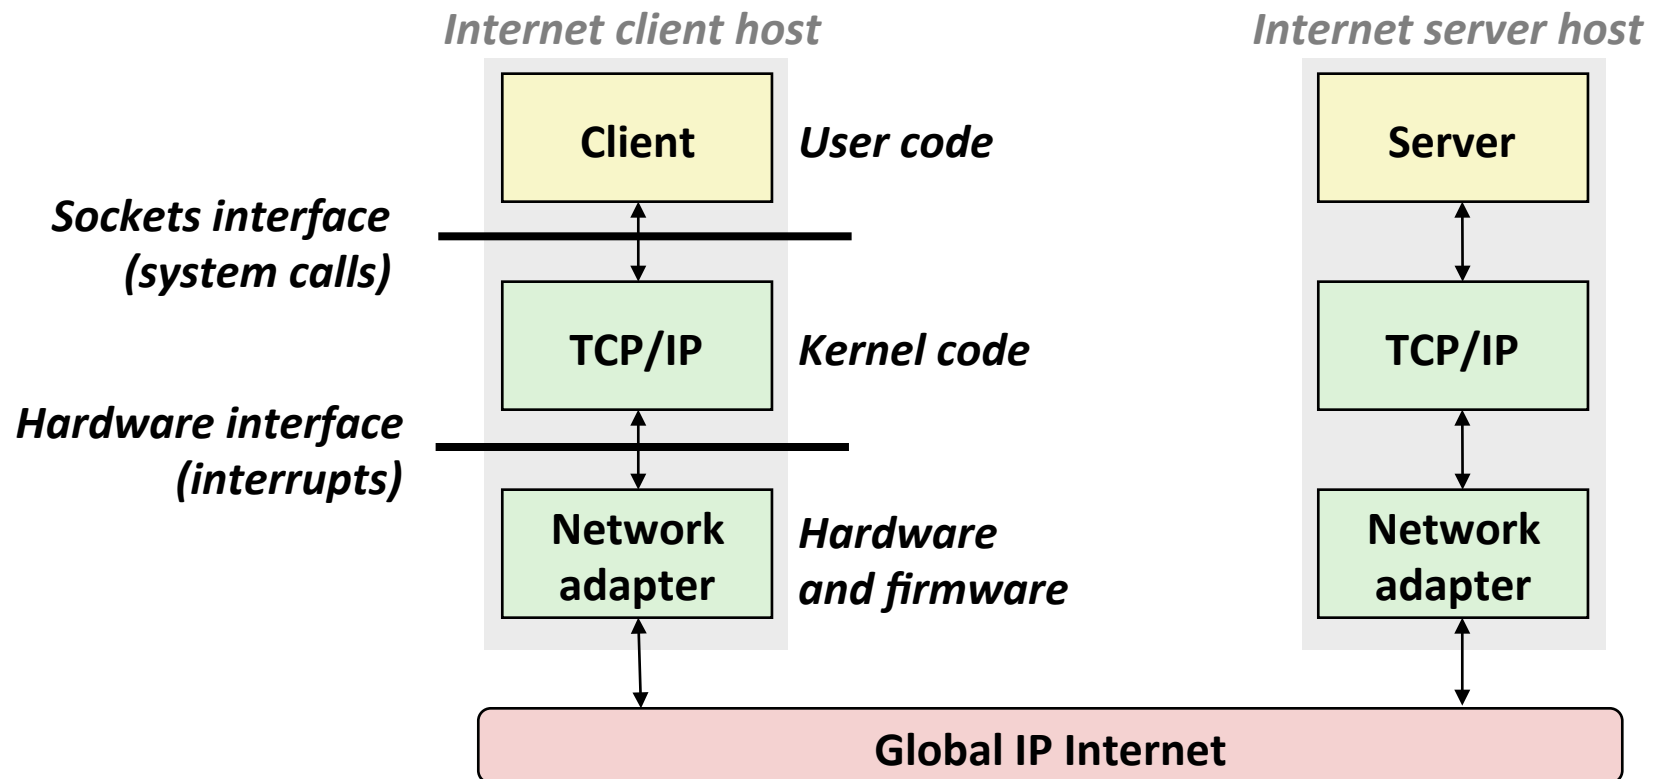

# History


- Launched as ARPAnet in 1969
- Switched to TCP/IP in 1983
- DNS (naming service) invented in 1985
- Web invented in 1989



# Naming and Communicating on the Internet

## ■ Original Idea

- Every node on Internet would have unique IP address
  - Everyone would be able to talk directly to everyone
- No secrecy or authentication
  - Messages visible to routers and hosts on same LAN
  - Possible to forge source field in packet header

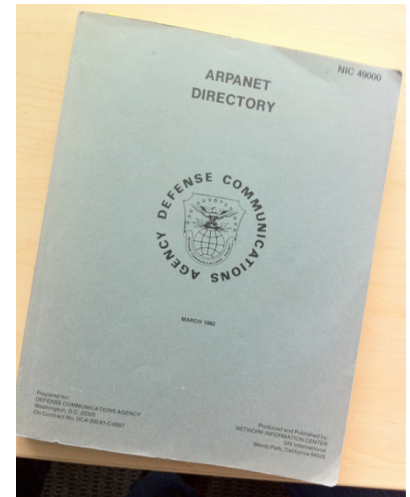


## ■ Shortcomings

- There aren't enough IP addresses available ( $2^{32}$  possible)
- Don't want everyone to have access or knowledge of all other hosts
- Security issues mandate secrecy & authentication
- Hard to remember numeric addresses

# Evolution of Internet: Naming

- **Dynamic address assignment**
  - Most hosts don't need to have known address
    - Only those functioning as servers
  - **DHCP** (Dynamic Host Configuration Protocol)
    - Local ISP assigns address for temporary use
  
- **Example:**
  - ifconfig (Unix)
  - ipconfig (Windows)

# Evolution of Internet: NAT

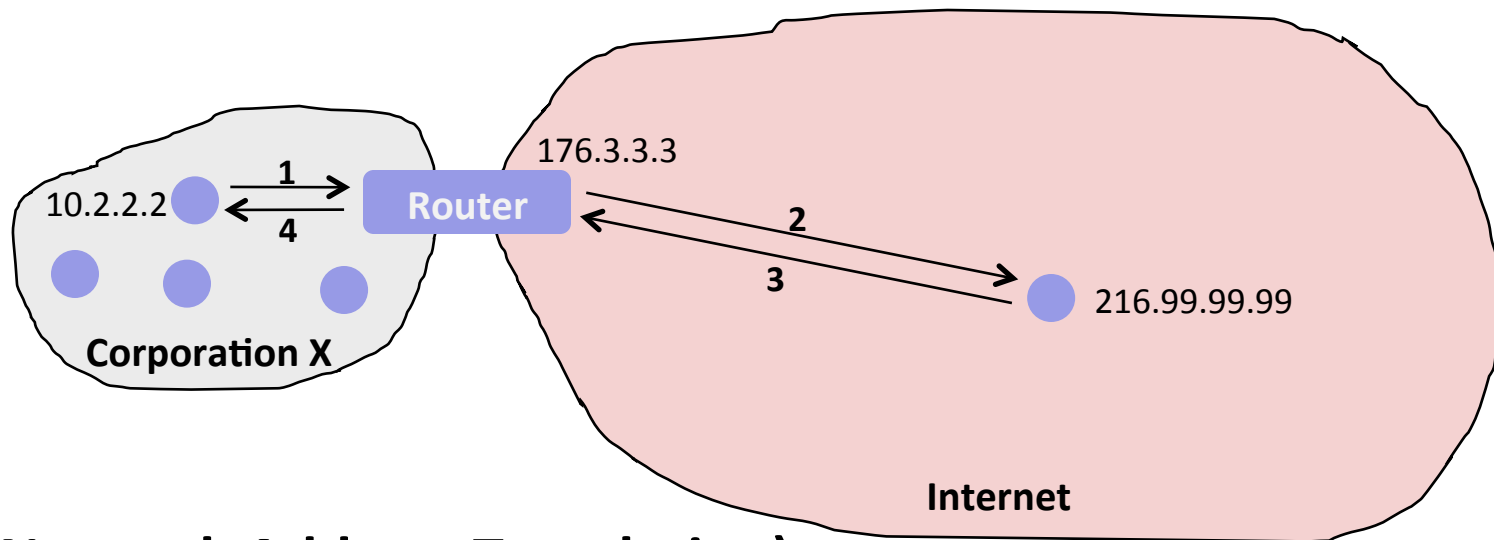

## ■ NAT (Network Address Translation)

- Hides organizations nodes from rest of Internet
- Use local IP addresses within organization
- For external service, provides proxy service


1. Client request: src=10.2.2.2, dest=216.99.99.99

2. Router forwards: src=176.3.3.3, dest=216.99.99.99

3. Server responds: src=216.99.99.99, dest=176.3.3.3

4. Router forwards response: src=216.99.99.99, dest=10.2.2.2

# Virtual Private Networks

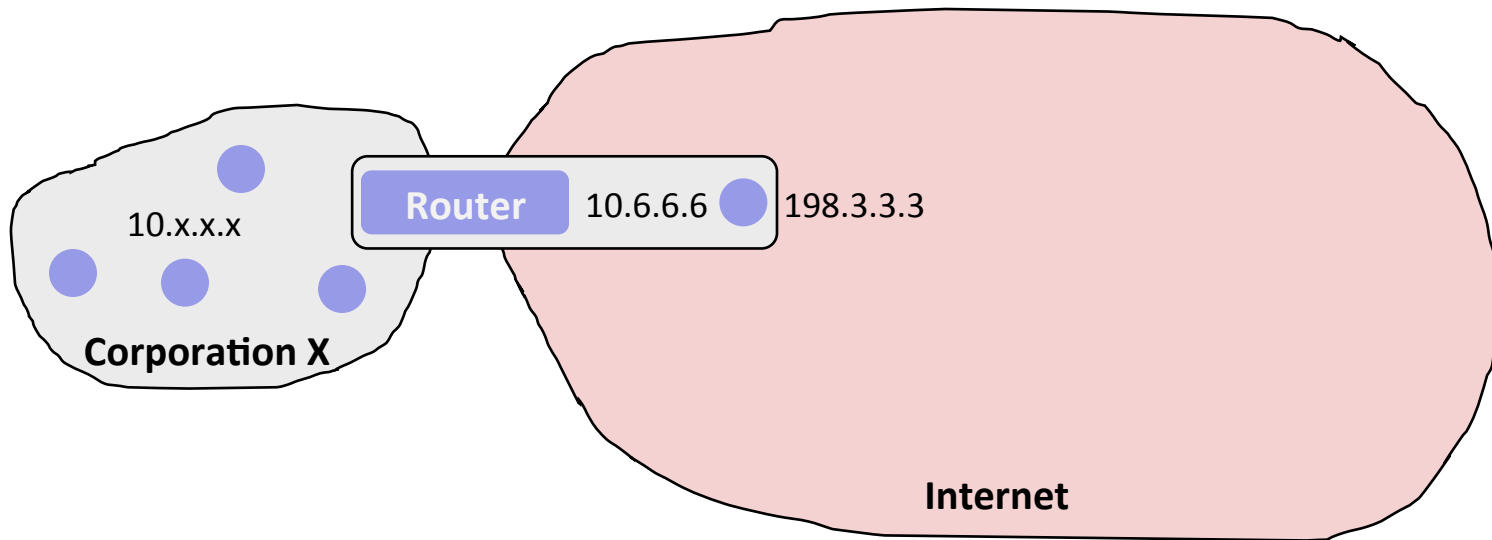

## ■ Supporting road warrior

- Employee working remotely with assigned IP address 198.3.3.3
- Wants to appear to rest of corporation as if working internally
  - From address 10.6.6.6
  - Gives access to internal services (e.g., ability to send mail)

## ■ Virtual Private Network (VPN)

- Overlays private network on top of regular Internet

# A Programmer's View of the Internet

- Hosts are mapped to a set of 32-bit *IP addresses*
  - 128.2.203.179
- The set of IP addresses is mapped to a set of identifiers called Internet *domain names*
  - 128.2.203.179 is mapped to `www.cs.cmu.edu`
- A process on one Internet host can communicate with a process on another Internet host over a *connection*

# IP Addresses

- **32-bit IP addresses are stored in an *IP address struct***
  - IP addresses are always stored in memory in network byte order (big-endian byte order)
  - True in general for any integer transferred in a packet header from one machine to another.
    - E.g., the port number used to identify an Internet connection.

```
/* Internet address structure */
struct in_addr {
    unsigned int s_addr; /* network byte order (big-endian) */
};
```

**Useful network byte-order conversion functions (“l” = 32 bits, “s” = 16 bits)**

**htonl**: convert uint32\_t from host to network byte order

**htons**: convert uint16\_t from host to network byte order


**ntohl**: convert uint32\_t from network to host byte order

**ntohs**: convert uint16\_t from network to host byte order

# Dotted Decimal Notation

- **By convention, each byte in a 32-bit IP address is represented by its decimal value and separated by a period**
  - IP address: `0x8002C2F2` = `128.2.194.242`
- **Functions for converting between binary IP addresses and dotted decimal strings:**
  - `inet_aton`: dotted decimal string → IP address in network byte order
  - `inet_ntoa`: IP address in network byte order → dotted decimal string
  - “n” denotes network representation
  - “a” denotes application representation

# Internet Domain Names

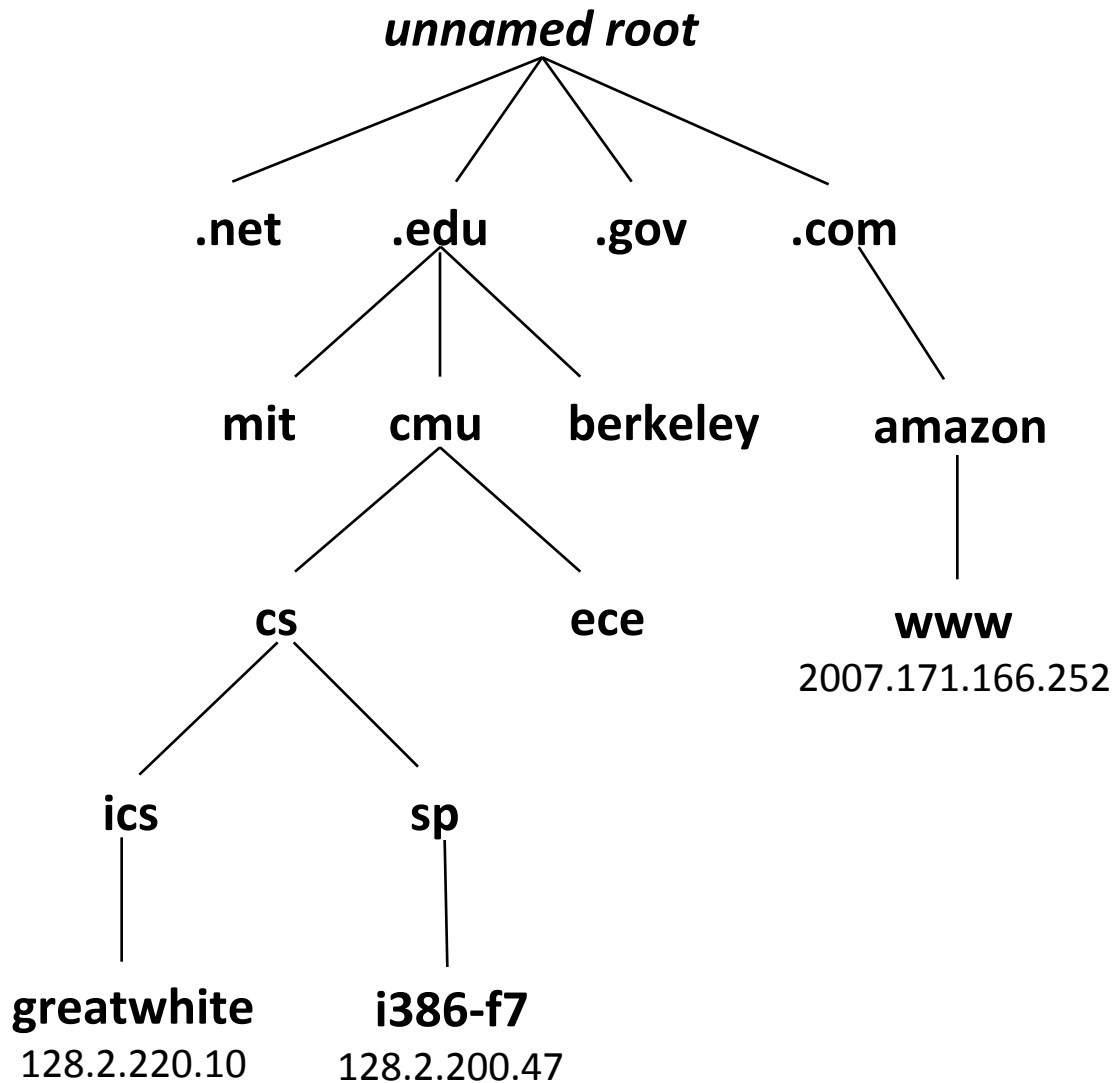

*First-level domain names*

*Second-level domain names*

*Third-level domain names*



# Domain Naming System (DNS)

- The Internet maintains a mapping between IP addresses and domain names in a huge worldwide distributed database called **DNS**
  - Conceptually, programmers can view the DNS database as a collection of millions of *host entry structures*:

```
/* DNS host entry structure */
struct hostent {
    char    *h_name;          /* official domain name of host */
    char    **h_aliases;     /* null-terminated array of domain names */
    int     h_addrtype;      /* host address type (AF_INET) */
    int     h_length;        /* length of an address, in bytes */
    char    **h_addr_list;   /* null-terminated array of in_addr structs
*/
};
```

- **Functions for retrieving host entries from DNS:**
  - **gethostbyname**: query key is a DNS domain name.
  - **gethostbyaddr**: query key is an IP address.


# Properties of DNS Host Entries

- Each host entry is an equivalence class of domain names and IP addresses
- Each host has a locally defined domain name `localhost` which always maps to the *loopback address* `127.0.0.1`
- Different kinds of mappings are possible:
  - Simple case: one-to-one mapping between domain name and IP address:
    - `greatwhile.ics.cs.cmu.edu` maps to `128.2.220.10`
  - Multiple domain names mapped to the same IP address:
    - `eeecs.mit.edu` and `cs.mit.edu` both map to `18.62.1.6`
  - Multiple domain names mapped to multiple IP addresses:
    - `google.com` maps to multiple IP addresses
  - Some valid domain names don't map to any IP address:
    - for example: `ics.cs.cmu.edu`

# Internet Connections

- Clients and servers communicate by sending streams of bytes over **connections**:
  - Point-to-point, full-duplex (2-way communication), and reliable.
- A **socket** is an endpoint of a connection
  - Socket address is an `IPAddress:port` pair
- A **port** is a 16-bit integer that identifies a process:
  - **Ephemeral port**: Assigned automatically on client when client makes a connection request
  - **Well-known port**: Associated with some service provided by a server (e.g., port 80 is associated with Web servers)
- A connection is uniquely identified by the socket addresses of its endpoints (**socket pair**)
  - `(cliaddr:cliport, servaddr:servport)`

# Putting it all Together: Anatomy of an Internet Connection

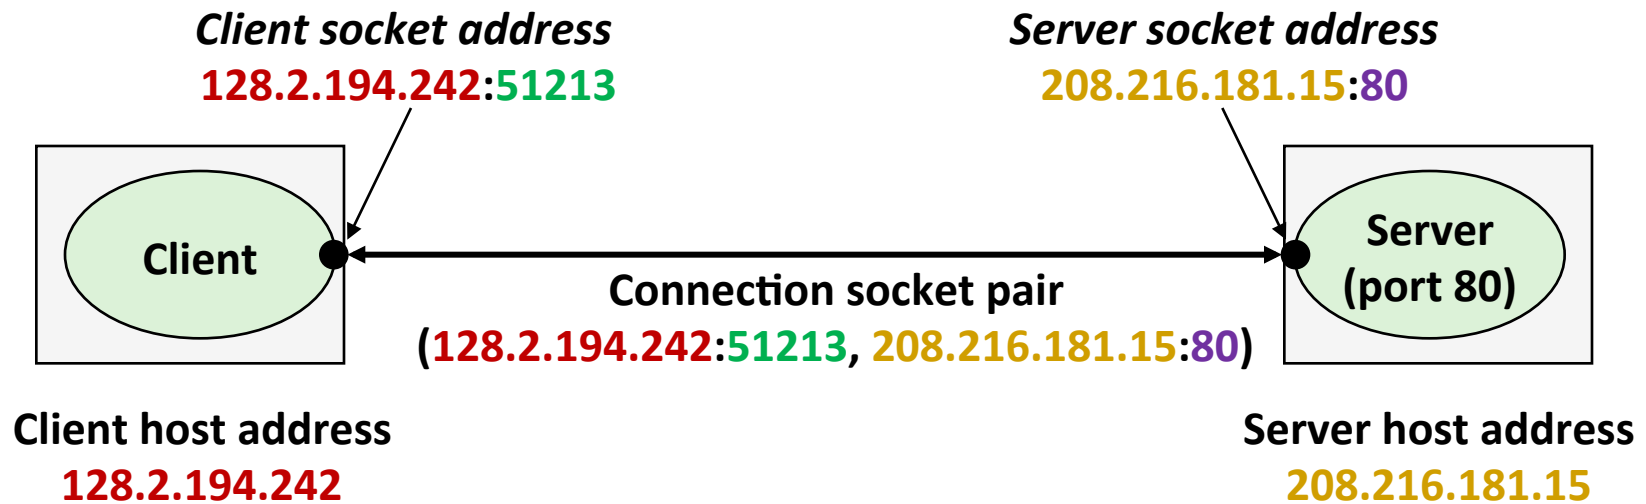

# Next Time

- **How to use the sockets interface to establish Internet connections between clients and servers**
- **How to use Unix I/O to copy data from one host to another over an Internet connection**