Name_____ Mailbox_____

ECE-320 Quiz #1

Problems 1 and 2 refer to the impulse responses of six different systems given below:

$$h_1(t) = [t + e^{-t}]\,u(t)$$
$$h_2(t) = e^{-2t}u(t)$$
$$h_3(t) = [2 + \sin(t)]\,u(t)$$
$$h_4(t) = [1 - t^3 e^{-0.1t}]\,u(t)$$
$$h_5(t) = [1 + t + e^{-t}]\,u(t)$$
$$h_6(t) = [te^{-t}\cos(5t) + e^{-2t}\sin(3t)]\,u(t)$$

1) The number of **stable systems** is a) 0 b) 1 c) 2 d) 3

2) The number of **unstable systems** is a) 0 b) 1 c) 2 d) 3

3) Which of the following transfer functions represents a **stable** system?

$$G_a(s) = \frac{s-1}{s+1} \qquad G_b(s) = \frac{1}{s(s+1)} \qquad G_c(s) = \frac{s}{s^2-1}$$
$$G_d(s) = \frac{s+1}{(s+1+j)(s+1-j)} \qquad G_e(s) = \frac{(s-1-j)(s-1+j)}{s} \qquad G_f(s) = \frac{(s-1-j)(s-1+j)}{(s+1-j)(s+1+j)}$$

a) all but G_c b) only G_a, G_b, and G_d c) only G_a, G_d, and G_f
d) only G_d and G_f e) only G_a and G_d

Problems 4 and 5 refer to the following transfer function

$$H(s) = \frac{2s+1}{(s+2)^2+1}$$

4) For this transfer function, the corresponding impulse response $h(t)$ is composed of which terms?

a) $e^{-t}\cos(2t), e^{-t}\sin(2t)$ b) $e^{-2t}\cos(t), e^{-2t}\sin(t)$
c) $e^{-t}\cos(4t), e^{-t}\sin(4t)$ d) $e^{-4t}\cos(t), e^{-4t}\sin(t)$

5) The **poles** of the transfer function are

a) $2 \pm j$ b) $-2 \pm j$
c) $-1 \pm 2j$ d) $-1 \pm 4j$

Name_____ Mailbox_____

Problems 6 – 8 refer to the signal flow graph representation of the following block diagram.

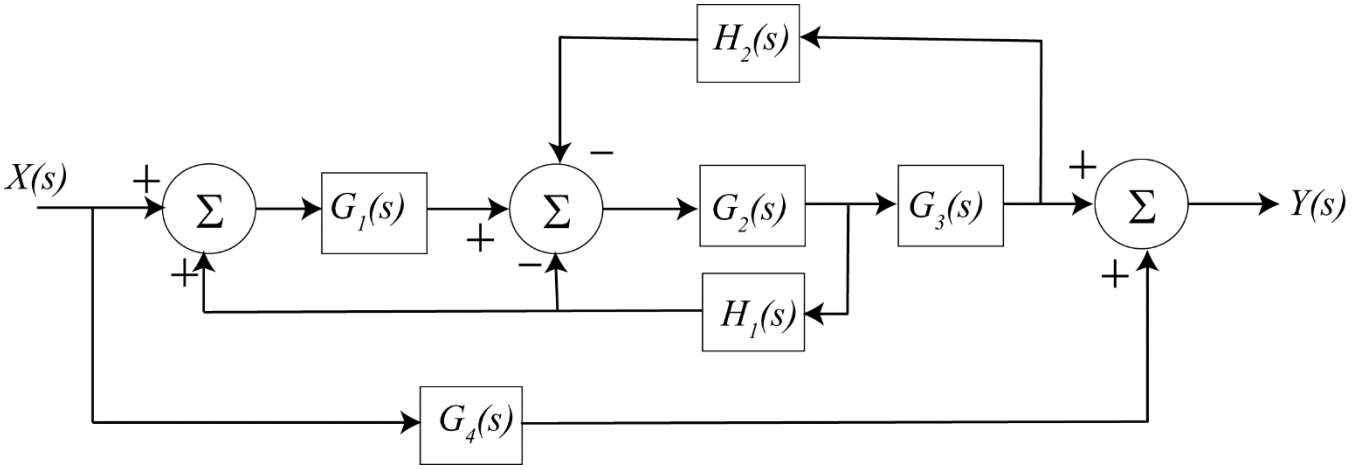

6) How many **paths** are there? a) 0 b) 1 c) 2 d) 3 e) 4

7) How man **loops** are there? a) 0 b) 1 c) 2 d) 3 e) 4

8) Are any of the **cofactors** equal to 1? a) yes b) no

For problems 9 – 12 consider the signal flow graph representation of the following block diagram.

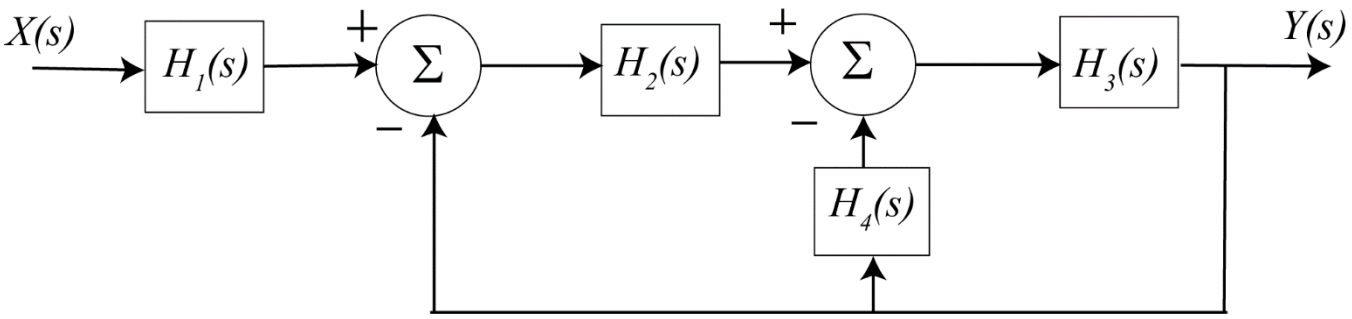

9) How many **paths** are there? a) 0 b) 1 c) 2 d) 3 e) 4

10) How many **loops** are there? a) 0 b) 1 c) 2 d) 3 e) 4

11) The **determinant** (Δ) is a) 1 b) $1-H_2H_3-H_3H_4$ c) $1+H_2H_3+H_3H_4$ d) none of these

12) The **transfer function** is a) 1 b) $\dfrac{H_1H_2H_3}{1-H_2H_3-H_3H_4}$ c) $\dfrac{H_1H_2H_3}{1+H_2H_3+H_3H_4}$