


Name \_\_\_\_\_ CM \_\_\_\_\_

### ECE-205 Quiz 6

1) For this problem, assume  $h_1(t) = \delta(t-1)$ ,  $h_2(t) = \delta(t+2)$

- a) Is the system with impulse response  $h_1(t)$  causal?      a) Yes   b)No
- b) Is the system with impulse response  $h_1(t)$  BIBO stable?    a)Yes   b)No
- c) Is the system with impulse response  $h_2(t)$  causal?      a) Yes   b)No
- d) Is the system with impulse response  $h_2(t)$  BIBO stable?    a)Yes   b)No

For the following four questions, assume we have a **series** connection (top) and a **parallel** connection (bottom)

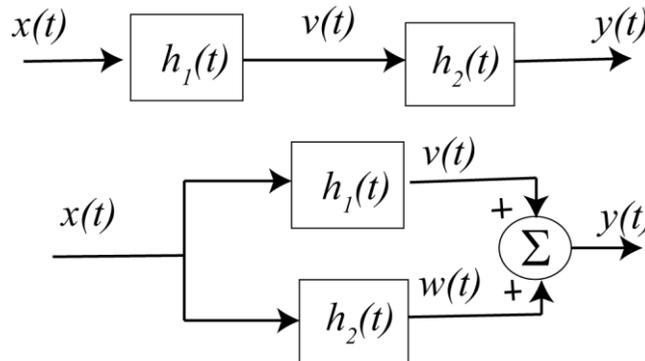

- e) Determine the overall impulse response (the impulse response between input  $x(t)$  and output  $y(t)$ ) for the **series** connection
  
- f) Is the **series** system causal?    a) Yes   b)No
  
- g) Determine the overall impulse response (the impulse response between input  $x(t)$  and output  $y(t)$ ) for the **parallel** connection
  
- h) Is the **parallel** system causal?    a) Yes   b) No

2) An LTI system has input, impulse response, and output as shown below. Determine numerical values for the parameters  $a-l$ . Note that parameters  $a-g$  correspond to *times*, and  $h-l$  correspond to *amplitudes*.

*Note that the output graph is only an approximate sketch of the output. Do not try to read values from this sketch.*

