

TYPES, CONVERSION, LISTS, AND STRINGS

Outline

- More on Numeric Types
- Long Integers vs. Floats
- Type Conversion
- Lists and Strings
- Lab Time

Program Grade Components

Percent	Feature
≥ 70	<p>Correctness:</p> <p>The program accomplishes what the assignment specifies</p>
≤ 15	<p>Documentation:</p> <p>Comments at beginning of the program. Your name, what the program does</p> <p>How the program is to be run (interactive or reads a file; if the latter, what is its format?)</p> <p>Doc comments for classes and functions</p> <p>Internal comments for any parts of the program that may not be obvious to a human reader</p>
≤ 15	<p>Style/maintainability:</p> <p>Sensible variable and function names</p> <p>No magic numbers</p> <p>Reasonable decomposition into functions, classes, methods</p> <p>Sensible SVN commit messages</p>

Seeing Your Grades in ANGEL

- In the CSSE 120 ANGEL course, choose the REPORTS tab
- Under CATEGORY, choose GRADES
- Click RUN
- You will have to scroll down to see some of your grades.

Numeric Types - Recap

- int : integer type

- Exact values – limited range
- An operation on two ints **always** yields an int

- float : real number type

- Approx. values – much larger range
- An operation on float and int yields a float

```
>>> 5/3
```

```
1
```

```
>>> 5.0/3
```

```
1.6666666666666667
```

```
>>> 5/2
```

```
2
```

```
>>> 5/2.0
```

```
2.5
```

```
>>> 5%3
```

```
2
```

```
>>> 5%2
```

```
1
```

```
>>> 5.0//2.0
```

```
2.0
```

- Do quiz question 1

Integer Representations

- An **int** is represented by a fixed-length sequence of bits.
 - A **bit** is a **binary digit**: its value is either 0 or 1.
 - On typical 2008 architectures, that length is 32.
 - How many different values can be represented by n bits?
- Thus there is a largest **int** value.
- How to deal with larger integer values?
 - Use floats? What could be wrong with that?
 - Do what other languages do? (overflow)

Python's **long** integer type

- Allows arbitrarily large integers
- Automatically created when needed:

```
>>> 10**10  
10000000000L
```
- You can specify a long literal

```
>>> 4L/2  
2L  
>>> type(4L)  
<type 'long'>
```
- Since **long** covers all integers (up to the memory limits of the computer) why have an **int** type at all?
 - Why not use long for all integer calculations?

Type Conversions

- Sometimes we have a value of one type, but we need the corresponding value of another type.
- In some cases, conversion is automatic:
 - $x = 3$
 $y = x/7.5$
- Python provides functions that allow you to explicitly convert data to another type.
 - `int()`
 - `float()`
 - `str()`

Sequences in Python

- A sequence is an ordered collection of data items.
There are two kinds:
 - List: mutable `[3, 4, 6]`
 - Tuple: immutable `(3, 4, 6)`
- Simple examples of generating lists and tuples:
 - `>>> range(4, 11, 2)`
`[4, 6, 8, 10]`
 - `>>> 3*4, 3-4, 3+4, 3/4`
`(12, -1, 7, 0)`

Slices of a List

- `list[m:n]` returns a new list consisting of `[list[m], list[m+1], list[m+2], ... list[n-1]]`
- `list[:n]` returns a new list consisting of `[list[0], list[1], ... list[n-1]]`
- `list[m:]` returns a new list consisting of all elements of list beginning with `list[m]`.
- `list[m:n:k]`, similar to `range(m, n, k)`, returns a new list consisting of every k^{th} element of list, starting with `list[m]`.

Two More Sequence Operations

- **len(<sequence>)**
 - ▣ Returns length of the sequence
- **<sequence>.index(<expr>)**
 - ▣ Returns the index of the first occurrence of the expression in the sequence

Strings (character strings)

- **String literals:**
- `"One\nTwo\nThree"`
- `"Can't Buy Me Love"`
- `'I say, "Yes." You say, "No." '`
- `"'A double quote looks like this \", ' he said."`
- `""I don't know why you say "Goodbye," I say "Hello." ""`

String Operations

- Many of the operations listed in the book, while they work in Python 2.5, have been superseded by newer ones.
- `+` is used for String concatenation: `"xyz" + "abc"`
- `*` is used for String duplication: `"xyz " * 4`
- A String method: **split** breaks up a string into separate words.

```
□ >>> franklinQuote = 'Who is rich? He who is content. ' +  
    'Who is content? Nobody.'
```

```
□ >>> franklinQuote.split()  
['Who', 'is', 'rich?', 'He', 'who', 'is', 'content.',  
 'Who', 'is', 'content?', 'Nobody.']
```

```
□ >>> franklinQuote.lower()  
'who is rich? he who is content.  who is content? nobody.'
```

Strings as Sequences

- A string is an **immutable** sequence of characters
- `>>> alpha = "abcdefg "`
- `>>> alpha[2]`
- `>>> alpha[1:4]`
- `>>> alpha[3] = "X " # illegal!`

Lists of Strings

```
>>> beatles = ['John', 'Paul']
>>> beatles.append('George')
>>> beatles
['John', 'Paul', 'George']
>>> beatles + ['Ringo']
['John', 'Paul', 'George', 'Ringo']
>>> beatles
['John', 'Paul', 'George']
>>> beatles = beatles + ['Ringo']
>>> beatles
['John', 'Paul', 'George', 'Ringo']
>>> beatles[1]
'Paul'
>>> beatles[1][2]
'u'
```

A Loop to Make a List

- Python's fancy term for this: **list comprehension**.
- ```
>>> [i*i for i in range(6)]
```

```
[0, 1, 4, 9, 16, 25]
```
- ```
>>> [[i, i*i] for i in range(5)]
```

```
[[0, 0], [1, 1], [2, 4], [3, 9], [4, 16]]
```
- Can you write a list comprehension for the value of cosine every 45 degrees around a circle?

A List of Points

```
from zellegraphics import *
```

```
win = GraphWin()
```

```
pointList = [Point(30, 120), Point(150, 55), Point(80, 175)]
```

```
poly = Polygon(pointList)
```


```
poly.setFill("maroon")
```

```
poly.draw(win)
```

```
for point in pointList:
```

```
    circ = Circle(point, 20)
```

```
    circ.draw(win)
```

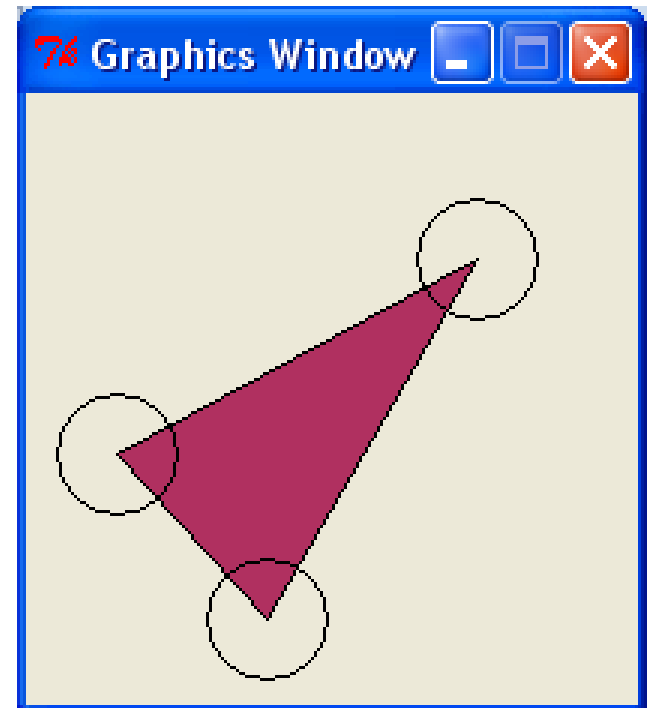

Homework 4

- See instructions linked from Course Schedule
- Upload solutions to dropboxes on ANGEL
 - ▣ Due at start of next session
- Once you "get the hang" of problems 3 and 4, you should probably start on *Pizza*, *Polygon*, and *Star* while we're here to help.