

FOLDS IN HASKELL

Curt Clifton

Rose-Hulman Institute of Technology

SVN Update *HaskellInClass* folder,
open *fold.hs*

EXAMPLE: ADLER-32

- Concatenates two 16-bit checksums
 - First is the sum of all the input bytes, plus 1
 - Second is the running total of the intermediate values of the first checksum
 - Both are modulo 65521

LEFT FOLD

operation

accumulator

```
foldl :: (a -> b -> a) -> a -> [b] -> a
foldl op acc (x:xs) = foldl op (op acc x) xs
foldl _ acc _      = acc
```

list to process

ADLER-32 WITH FOLDL

```
foldl :: (a -> b -> a) -> a -> [b] -> a
foldl op acc (x:xs) = foldl op (op acc x) xs
foldl _ acc _      = acc
```

```
adler32_v3 :: String -> Int
adler32_v3 xs = let (chSum1,chSum2) = foldl procByte (1,0) xs
                  in (chSum2 `shiftL` 16) .|. chSum1
  where procByte (chSum1,chSum2) x =
        let chSum1' = (chSum1 + (ord x .&. 0xff))
            in (chSum1' `mod` base, (chSum1' + chSum2) `mod` base)
```

RIGHT FOLD

```
foldr :: (a -> b -> b) -> b -> [a] -> b
foldr op acc (x:xs) = op x (foldr op acc xs)
foldr _ acc []      = acc
```

Consider: *foldr (+) 0 [1..3]*

Input: *1 : (2 : (3 : []))*

Result: *1 + (2 + (3 + 0))*

THE POWER OF FOLDR

```
-- filter using foldr
myFilter :: (c -> Bool) -> [c] -> [c]
myFilter pred xs = foldr op [] xs
    where op x acc | pred x      = x : acc
                  | otherwise = acc
```

```
-- map using foldr
myMap :: (c -> d) -> [c] -> [d]
myMap f xs = foldr op [] xs
    where op x acc = (f x) : acc
```

```
-- append using foldr
append :: [c] -> [c] -> [c]
append xs ys = foldr (:) ys xs
```

Try to match
types here to
types in foldr's
signature

FOLDL VS. FOLDR

- `any :: (a -> Bool) -> [a] -> Bool`
- `any odd [2,4,6] == False`
- `any odd [2,5,6] == True`
- `any odd [] == False`





```
any p xs = foldr op False xs
           where op x acc | p x = True
                           | otherwise = acc

any p xs = foldl op False xs
           where op acc x | p x = True
                           | otherwise = acc
```

SPACE LEAKS

- *foldl* generates big thunks
 - take lots of space to store and evaluate
 - can use *foldl'* for strict (non-lazy) version
- *foldr* may generate big thunks...
 - ...but most applications don't if they leave right-side unchanged or ignore it

FACTORING THE TIME

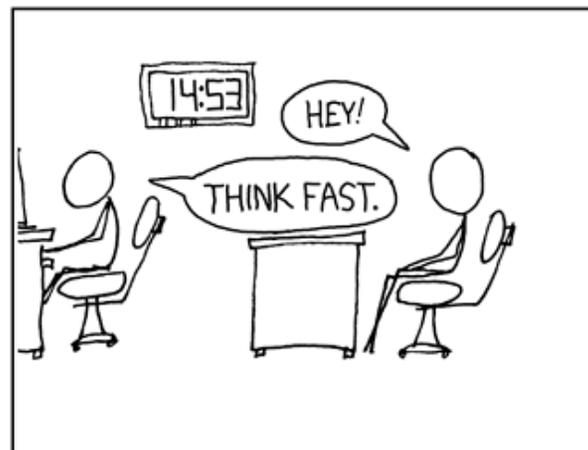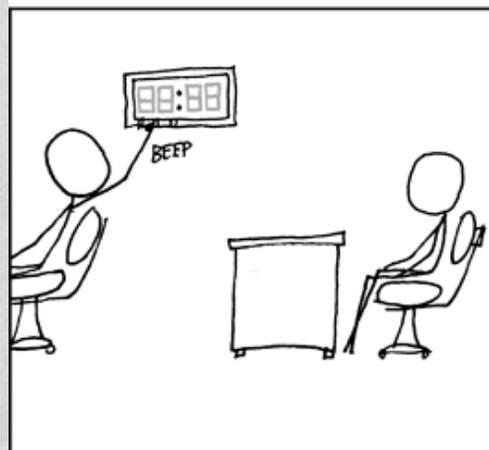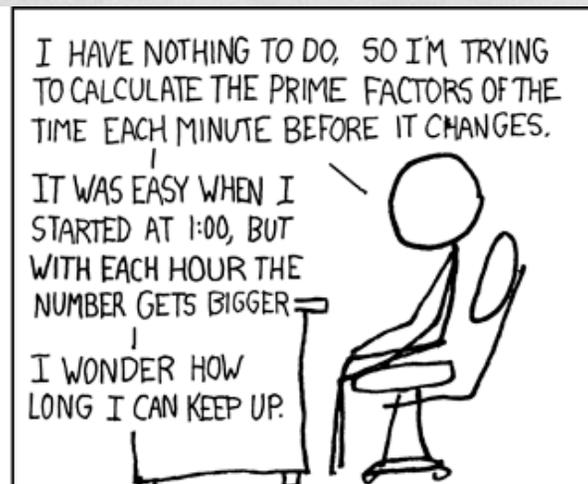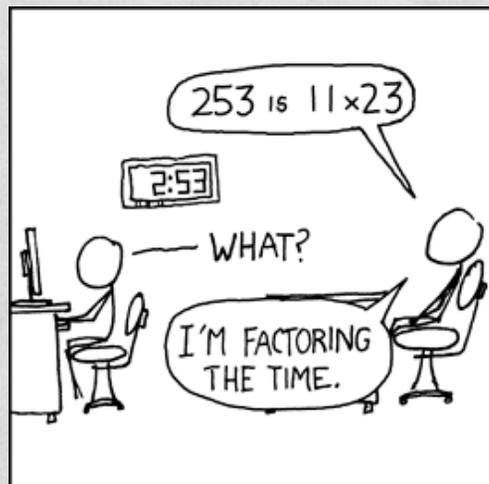

I occasionally do this with mile markers on the highway.

MISCELLANY

LAMBIDAS

- Problem: defining simple function arguments to library functions can require verbose helpers
- Solution: lambdas
- Example expression: $(\backslash x y \rightarrow \text{abs}(x-y) < 5)$
- Example use: `nubBy (\backslash x y -> abs(x-y) < 5) [1..20]`

CURRIED FUNCTIONS

- Curried functions take a single argument and return functions taking subsequent arguments
- All functions automatically curried
- Allows “partial application”



Mmm, curry

CURRIED FUNCTIONS

- Curried functions take a single argument and return functions taking subsequent arguments
- All functions automatically curried
- Allows “partial application”

```
ghci> :module +Data.Char
ghci> :t dropWhile
dropWhile :: (a -> Bool) -> [a] -> [a]
ghci> :t dropWhile isSpace
dropWhile isSpace :: [Char] -> [Char]
ghci> let lTrim = dropWhile isSpace
ghci> let m = ["dog", " cat", " raptor "]
ghci> map lTrim m
["dog","cat","raptor "]
```

SECTIONS

- Can partially apply infix operators on either side
- E.g., (`==2`), (`>2`), (`2*`)

```
ghci> :t (2^)  
(2^) :: (Num t, Integral b) => b -> t  
ghci> :t (^2)  
(^2) :: (Num a) => a -> a  
ghci> map (^2) [1..4]  
[1,4,9,16]  
ghci> map (2^) [1..4]  
[2,4,8,16]
```

AS-PATTERNS

- Problem: sometimes we need to pattern match, but want to refer to the whole value in the definition
- Solution: as-patterns
- Example: `xs@(_:_)`, matches non-empty list, binds `xs` to whole list
- Application: `sufs xs@(_:xs') = xs : sufs xs'`
`sufs _ = []`

`sufs "whale" == ["whale", "hale", "ale", "le", "e"]`

DOT NOTATION

- Problem: often we can compose library functions, but nested parens get ugly
 - $capCount\ s = length\ (filter\ p\ (words\ s))$
where $p\ w = isUpper\ (head\ w)$
- Solution: dot notation composes functions right-to-left
 - $capCount = length . filter\ (isUpper . head) . words$

HASKELL STYLE GUIDELINES

- *map*, *filter*, *take*, and company are your friends
- Prefer compositions of library functions over folds
- Prefer folds over custom tail recursion
- Use recursion when you must
- Avoid anonymous lambdas